


Technical drawing of a road cross-section showing three stone-filled pits. The drawing includes dimensions for the pits (3900, 4500, 3000), road width (37250, 38100, 37750), and elevations (402.42, 402.46, 401.47, 401.53, 402.21, 402.25). Slopes are indicated as 1:1.5 and 1:1. A dashed line labeled 'A-A' runs through the center.

40 mm - ACO 11	70 mm - ACP 16+
PS	PS
150 mm - ŠDb (0	150 mm - ŠDb (0

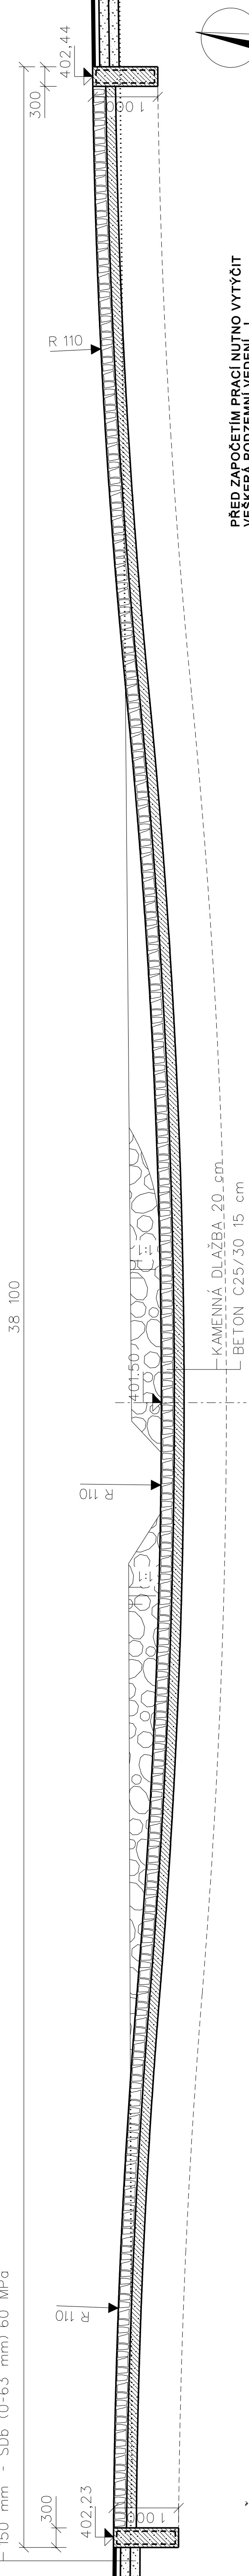


Technical drawing of a drainage channel cross-section. The channel is 20 cm high and 30 cm wide, made of concrete (BETON C25/30). It is flanked by stone bedding (KAMENNÁ DLAŽBA) and has a 1.0% slope. The drawing shows elevations of 401.47, 401.50, and 401.53. It also indicates a 2.500m distance between points and a 300mm width for the stone bedding. Labels include 'KAMENNÁ ROVNANINA ZRNA 200 kg' and 'KAMENNÁ DLAŽBA 20 cm'.

**PŘED ZAPOČETÍM PRACÍ NUTNO VYTÝČIT
VEŠKERÁ PODZEMNÍ VEDENÍ !**

BETON C25/30	47,40 m ³
KAMENNÁ DLAŽBA	29,40 m ³
TL. 0,20 m	
KAMENNÁ ROVNANINA	48,0 m ³
ZRNA 200 kg	
SIŤ 100x100x6 mm	797,0 kg
180 m	

DILATAČNÍ SPÁRY V PRAŽÍCH PO ÚSECÍCH DL. cca. 6,0 m - CELKEM 16
VÝPLN DIL. SPÁRY - 2x ASFALTOVÝ PÁS S60 V35

	<p>KOKYCANOVA 114/IV VYSOKE MYTO 566 01</p>		
<p>Kraj : Pardubický</p> <p>OU : Dolní Čermná</p> <p>Investor : ČR – Státní pozemkový úřad, pobočka Ústí nad Orlicí</p> <p>Akte :</p>	<p>Zodpovědný Projektant</p>	<p>Zodpovědný Zástupce</p>	<p>Kontrola</p>
<p>Kraj : Pardubický</p> <p>PÚSRP : Lanškroun</p>			
<p>Společná zařízení v k.ú. Dolní Čermná Polní cesta C27</p>			
<p>Obsah :</p>	<p>BROD km 0,330 50 - 368 60</p>	<p>Datum : 10. 2018</p> <p>Formát : 10 A4</p> <p>Zak.číslo : 005 30/18</p> <p>Měřítka : 1:50</p> <p>Příloha : C.1.2.10.</p>	<p>Supčet : DSP + DPS</p>